

BUNN® *INTERNATIONAL*

BrewWISE® Dual ThermoFresh® DBC Brewer

ITEM# _____

PROJECT _____

DATE _____

Features

BrewWISE® Brewing System with ThermoFresh® Servers

- Stores individual coffee recipes so operator can easily brew many varieties.
- Coffee extraction controlled with pre-infusion and pulse brew, digital temperature control, and large sprayhead; coffee strength controlled with variable by-pass.
- Operate any combination of BrewWISE® equipment error-free with wireless brewer-grinder interface through the Smart Funnel.
- SplashGard® funnel and optional funnel locks help improve safety.
- ThermoFresh® servers are vacuum insulated to keep coffee hot and fresh for hours. (sold separately)
- Metric volume and Celsius temperature settings.
- Create coffee recipe cards with custom recipes, ad cards with messages that display on the brewer LCD, and dedicated funnels for special coffees with the BrewWISE Recipe Writer using your PC (U.S. and English Windows® compatible).
- Brew capacity varies by model. See back for details.



Dual TF DBC with TF Servers

(servers sold separately)

Dimensions: 35.7" H x 21.8" W x 20.2" D
(90.7cm H x 55.4cm W x 51.3cm D)



Stainless steel finish available.

For current specification sheets and other information, go to www.bunn.com.

International models may vary in appearance.

Related Products

Easy Clear® EQHP-10
Product No. : 39000.0004



Easy Clear® EQHP-10L
Product No. : 39000.0001

Single/Dual Filter Pack
Product No. : 20138.0000



BrewWISE® Recipe Writer (BRW)




Recipe Card
Product No.: 34447.0000

- Program a recipe to be used on brewer or grinder.



Ad Card
Product No.: 34448.0000

- Program a message to appear on the brewer's display.



Multi-Hopper Grinder (MHG)



TF Servers



Dimensions & Specifications

Model	Product #	Volts	Amps	Tank Heater Watts	Total Watts	Brewing Capacity	Shipping Weight	Cord Attached	Agency
Dual TF DBC	34600.0010	230	26.5	2@3300	6100	18.9 gal/hr (71.5 l/hr)	92.5 lbs. (41.96 kg)	No	CE V W PG
Dual TF DBC†	34600.0011	230	26.5	2@3300	6100	18.9 gal/hr (71.5 l/hr)	92.5 lbs. (41.96 kg)	No	CE V W PG
Dual TF DBC†	34600.0013	200	26.4	2@3300	5270	18.9 gal/hr (71.5 l/hr)	92.5 lbs. (41.96 kg)	No	
Dual TF DBC*	34600.0014	230	26.5	2@3300	6100	18.9 gal/hr (71.5 l/hr)	92.5 lbs. (41.96 kg)	No	CE V W PG
Dual TF DBC*†	34600.0015	230	26.5	2@3300	6100	18.9 gal/hr (71.5 l/hr)	92.5 lbs. (41.96 kg)	No	CE V W PG
Dual TF DBC*†	34600.0017	200	26.4	2@3300	5270	18.9 gal/hr (71.5 l/hr)	92.5 lbs. (41.96 kg)	No	


* Models have black decor. †With funnel locks.

Brewing capacity: based upon incoming water temp of 60°F (15.5°C), 140°F rise (60°C).
TF Server sold separately.

Electrical: 230 volt models require 2-wires plus ground service rated 220/240V, single phase, 50/60Hz.

200 volt model requires 2-wires plus ground service, single phase, 50Hz.

Plumbing: 20-90 psi (138-621 kPa). Machine supplied with 3/8" male fitting.

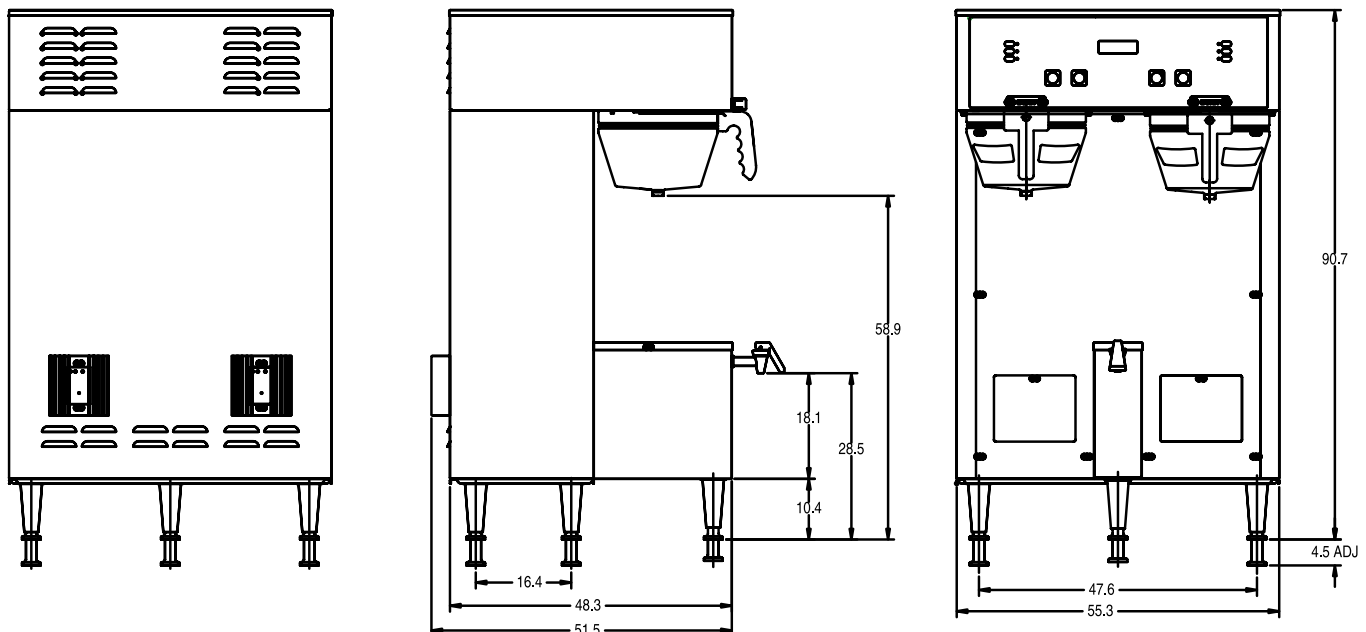

BUNN Corporation - 1400 Stevenson Drive Springfield, Illinois 62703 • USA • +1-217-529-6601 • Fax +1-217-529-2827 • www.bunn.com

BUNN® practices continuous product research and improvement. We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment.

All dimensions shown in centimeters. Bunn Corporation owns all copyrights relating to materials in this publication. Please contact Bunn Corporation to request permission to reproduce any portion of this publication.